


Ronix[®]

Premium Quality

DEMOLITION HAMMER

2830

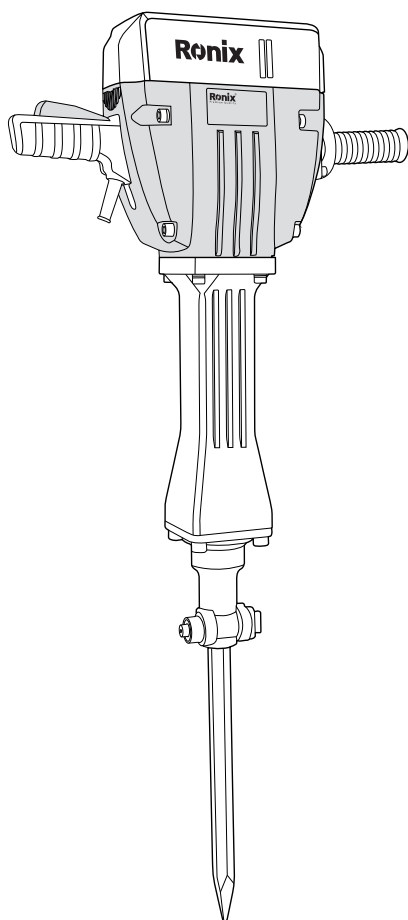


SPECIFICATIONS

Model	2830
Power	2200W
Voltage	240-220V
Frequency	60-50Hz
Chuck Type	HEX
Chuck Size	28 mm
Impact Energy	75J
Max Impact Rate	950 BPM
Weight	30kg
Supplied in	Ronix trolley
Includes	Auxiliary Ronix-design handle, Grease tube, hex flat chisel, hex pointed chisel, 2 Wheels, Frame, Tool bag (4 Hex ,Pair of carbon brushes)

STANDARD ACCESSORIES

Hexagon bar wrench 12mm (for M14)	1 Piece
Hexagon bar wrench 8mm (for M10)	1 Piece
Hexagon bar wrench 6mm (for M8)	1 Piece
Hexagon bar wrench 5mm (for M6)	1 Piece
One bottle of grease	60 gr
Bull point chisel (28*530mm)	1 Piece
Flat chisel (28*530mm)	1 Piece
Carbon brush	1 Piece
Hand trolley	1 Piece

PARTS LIST

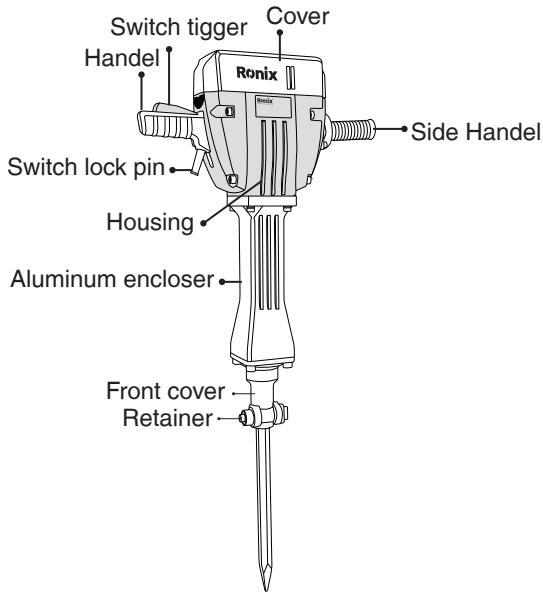

APPLICATION

This hammer should be applied to breaking concrete, chipping off concrete, grooving, bar cutting, and driving piles in installation of piping and wiring, unitary facility installation, machinery installation water supply, and drainage work, interior jobs, harbor facilities and other civil engineering work etc...

SAFETY SYMBOLES

In this operator's manual/or machine's labels following symbols are used



Read the manual carefully



Accordance with essential applicable safety of European directives.



Double insulation



Wear ear and eye protection.



Denote risk of personal injury, loss of life or damage to the tool in case of nonobservance of the instruction in this manual.



Indicate electrical shock hazard.



Immediately unplug the plug from the main electricity in the case that the cord gets damage and during maintenance.



Faulty and /or discarded electrical or electronic apparatus have to be collected at the appropriate recycling location.

GENERAL POWER TOOL SAFETY WARNINGS



WARNING!

Read all safety warnings and all instructions. Failure to follow all warnings and instructions may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference.

The term “power tool” in the warnings refer to your mains operated (corded) power tool or battery operated (cordless) power tool.

■ WORK AREA SAFETY

a) Keep work area clean and well lit. Cluttered and dark areas invite accidents.

b) Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust. Power tools create sparks which may ignite the dust or fumes.

c) Keep children and bystanders away while operating a power tool. Distractions can cause you to lose control.

■ ELECTRICAL SAFETY

- a) Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools. Unmodified plugs and matching outlets will reduce risk of electric shock.
- b) Avoid body contact with earthed or grounded surfaces such as pipes, radiators, ranges and refrigerators. There is an increased risk of electric shock if your body is earthed or grounded.
- c) Do not expose power tools to rain or wet conditions. Water entering a power tool will increase the risk of electric shock.
- d) Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts. Damaged or entangled cords increase the risk of electric shock.
- e) When operating a power tool outdoors, use an extension cord suitable for outdoor use. Use of a cord suitable for outdoor use reduces the risk of electric shock.
- f) If operating a power tools in a damp location is unavoidable, use a residual current device (RCD) protected supply. Use of an RCD reduces the risk of electric shock.

■ PERSONAL SAFETY

- a) Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating power tools may result in serious personal injury.
- b) Use personal protective equipment. Always wear eye protection. Protective equipment such as dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries.
- c) Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source, picking up or carrying the tool. Carrying power tools with your finger on the

switch or plugging in power tools that have the switch on invites accidents.

d) Remove any adjusting key or wrench before turning the power tool on. A wrench or a key left attached to a rotating part of the power tool may result in personal injury.

e) Do not overreach. Keep proper footing and balance at all times. This enables better control of the power tool in unexpected situations.

f) Dress properly. Do not wear loose clothing or jewelry. Keep your hair, clothing and gloves away from moving parts. Loose clothes, jewelry or long hair can be caught in moving parts.

g) If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used. Use of these devices can reduce dust related hazards.

■ **POWER TOOL USE AND CARE**

a) Do not force the power tool. Use the correct power tool for your application. The correct power tool will do the job better and safer at the rate for which it was designed.

b) Do not (use the power tool if the switch does not turn it on and off. Any power tool that cannot be controlled with the switch is dangerous and must be repaired.

c) Disconnect the plug from the power source before making any adjustments, changing accessories, or storing power tools. Such preventive safety measures reduce the risk of starting the power tool accidentally.

d) Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool. Power tools are dangerous in the hands of untrained users.

e) Maintain power tools. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use. Many accidents are caused by

poorly maintained power tools.

f) Keep cutting tools sharp and clean. Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control;

g) Use the power tool, accessories and tool bits etc., in accordance with these instructions, taking into account the working conditions and the work to be performed. Use of the power tool for operations different from intended could result in a hazardous situation.

■ SERVICE

a) Have your power tool serviced by a qualified repair person using only identical replacement parts in RONIX PLUS after sales centers. This will ensure that the safety of the power tool is maintained.

ADDITIONAL SAFETY RULES FOR HAMMER

1) Wear ear protectors with impact drills. Exposure to noise can cause hearing loss.

2) Use auxiliary handles supplied with the tool. loss of control can cause personal injury.

3) Wear a hard hat (safety helmet), safety glasses and/or face shield. It is also highly recommended that you wear a dust mask, ear protectors and thickly padded gloves.

4) Be sure the bit is secured in place before operation.

5) Under normal operation, the machine is designed to produce vibration. So the screws and bolts can come loose, causing a breakdown and accidents. Check tightness of them carefully before running.

6) In cold weather or a long time tool not be used, please keep the tool running without load a few minutes to warm up the grease inside, otherwise hammering function is difficult to get.

7) Be sure you stand stably and no one is below when you using tool is in high location.

- 8) Don't touch any moving parts.
- 9) Don't leave the tool running itself, operate tool only when hand-held.
- 10) Don't point the tool to anybody for the bit could fly out in case.
- 11) When chipping into walls floors or wherever "live"

⚠ WARNING!

- 1) Electrical wire may be encountered, don't touch any metal parts of the tool! Hold the tool by the insulated grasping surface to prevent electric shock if you chip into a "live" wire.
- 2) Don't touch the bit or parts close to the bit immediately after operation, they may extremely hot and could burn your skin.
- 3) Any damage and abnormal happen, please stop to use immediately and disconnect it, ask RONIX PLUS authorized service center to check and repair.
- 4) Parts replace: Only original parts can be used to replace by authorized RONIX PLUS service center.
- 5) Right use accessories and parts: Don't use other parts and accessories which not mentioned in the manual otherwise may cause injuries!
- 6) Special attention to voltage: Before connect the power tool, please make sure the rated voltage on the tool can match the power supply, otherwise the power tool may be damaged and cause injuries.
- 7) Don't wipe plastic part with solvent: solvent such as gasoline, thinner, alcohol, etc. these kind of chemical material, are not allowed to use, water or soap are recommended!

⚠ ATTENTION!

Through poor conditions of the electrical MAINS, shortly voltage drops can appear when starting the EQUIPMENT. This can influence other equipment (e.g. blinking of a lamp). If the MAINS-IMPEDANCE $Z_{max} < 0.174 \text{ OHM}$, such disturbances are not expected.

OPERATION INSTRUCTION


1. Power source

Ensure that the power source to be utilized conforms to the power requirements which specified on the name plate of the hammer.

2. Power switch

Ensure that the power switch is in the position of OFF. If the plug is connected to power receptacle while the power switch is in ON position, the demolition hammer will start operation immediately, which can cause serious accident!

SWITCH OPERATION

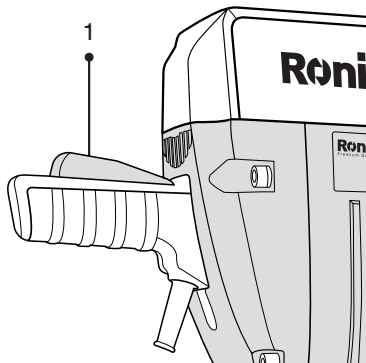

Switch on Press Switch Lever (1) to turn on

Switch off Release the switch lever (1)

OPERATION

1. Pull the trigger switch after applying the tip of the bit to crushing position. In some cases, it's necessary to punch the tip of the bit against the crushing position forcibly in order to begin the striking stroke. This is not due to malfunction of the power tool. It means that the safe guard mechanism against no-load striking is working.

2. Operate this demolition hammer by utilizing its own weight. The performance will not be better if it is pressed or thrust forcibly against the work surface. Hold with a force just sufficient to counteract the reaction.

▲ NOTE


Sometimes the power tool does not begin the striking stroke. Even though the motor keeps running, because the oil inside becomes thick. If the power tool is used at low temperature or if it is used at low temperature or if it is used after a long idle time, this demolition hammer should be kept running for above 5 minutes to warm up.

MOUNTING TOOL BIT

▲ WARNING

BEFORE DO IT, MAKE SURE UNPLUG THE MACHINE!

- (1) pull out of the retainer "2", turning 180 clockwise or anticlockwise, insert the accessory shank portion "1" into the hole on the front cover.
- (2) Turning the retainer back into original position.

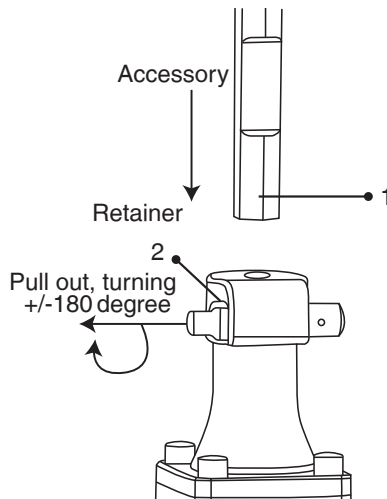

REMARKING!

When you removing the accessory, such as a bull point, a cutter etc., follow above procedure in reverse order.

GREASE AND OIL FILLING

WARNING!

Pull plug from power before any operations.

Demolition hammer mechanical part is easy to get worn and lose impact energy if without enough lubrication, recommend filling grease and oil after 6 months usage.

MAINTENANCE AND INSPECTION

Before do any maintenance, ensure unplug the plug

1. Inspecting the demolition hammer

Use a dull accessory, such as bull point, cutter, etc., will cause motor malfunction an efficiency degraded. Replace with a new one when your accessory is abrades.

2. Inspecting the mounting screws

Regularly inspect all mounting screws and ensure that they are properly tightened. Any loose should be tighten immediately, failure to do maybe cause serious hazard.

3. Inspecting the bit retainer

The retainer may become loose due to excessive use. Make sure the bit shank position is holded securely, if any wear or damage is found, ask the RONIX PLUS authorized service people to maintenance.

4. Maintenance the motor

The motor is the heart of the machine; please avoid any damage to the winding, or any water and oil to wet it.

5. Carbon brush replacements

Carbon brushes are consumable parts, when it becomes worn or “limit worn” it can cause motor trouble, we use auto-stop carbon brush, and it stopped automatically when carbon brush worn out, at that time, replace a new couple of them by RONIX PLUS authorized after sales services.

■ **CLEANING**

Clean the machine regularly with a soft cloth, preferably after each use. Solvent such as gasoline, thinner, alcohol, etc... these kind of chemical material, are not allowed to use, water or soap are recommended!

CAUTION!

Repair, modification and inspection of RONIX Power tools must be carried out by a RONIX SERVICE Authorized Service Center. In the operation and maintenance of power tools, the safety regulations and standards prescribed in each country must be observed.

Ronix[®]
Premium Quality

www.ronixtools.com