


#### **INSTRUCTION MANUAL**

# ELECTRIC SCREW DRIVER DRILL 2513-2513T





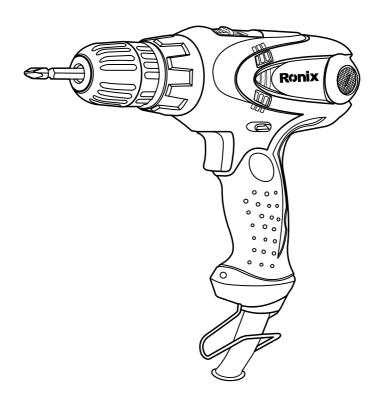





## **SPECIFICATIONS**

| Model           | 2513          | 2513T             |
|-----------------|---------------|-------------------|
| Rated Voltage   | 220V          | 220V              |
| Rated frequency | 50Hz          | 50Hz              |
| Input power     | 280W          | 280W              |
| No load speed   | 0-750RPM      | 0-440 , 0-1650RPM |
| Chuck capacity  | 3/8" (1-10mm) | 3/8" (1-10mm)     |
| Wood            | 26mm          | 26mm              |
| Steel           | 10mm          | 10mm              |
| Torque settings | 18+1          | 18+1              |
| Safety class    | II            | II                |
| Net weight      | 1.3Kg         | 1.3Kg             |



# A WARNING!

To reduse the risk of injury user must read instruction manual.

# **GENERAL SAFETY RULES**

## A WARNING!

Read all safety warnings and all instructions failure to follow all warning and instruction may result in election shock fire and/ or serious injury.

Save all warning and instructions for future reference The term "power tool" in the warning refer to your mains operated (corded) power tool or battery operated (cordless) power tool.

## **\_WORK AREA**

- keep your work area clean and well lit. Cluttered benches and dark areas invite accidents.
- Do not operate power tools in explosive atmospheres such as in the presence of flammable liquids gases or dust. power tools create sparks which may ignite the dust or fumes.
- keep children and bystanders away while operating a power tool. distractions can cause you to lose control.

## **\_ELECTRICAL SAFETY**

- power tool plugs must match the outlet. Never modify the plug in any way.

Do not use any adapter plugs with earthed (grounded) power tools. Unmodified plugs and matching outlets will reduce risk of electric shock.

- Avoid body contact with grounded surfaces such as pipes radiators ranges and refrigerators. There is an increased risk of electric shock if your body is grounded.
- Don't expose power tools to rain or wet conditions. Water entering a power tool will increase the risk of electric shock.
- Do not abuse the cord. Never use the cord for carrying pulling or unplugging the power tool. keep cord away from heat oil sharp edges or moving parts. damaged or entangled cords increase the risk of electric shock.
- when operating a power tool outdoors use an outdoor extension cord marked "W-A" or "W". these cords are rated for outdoor use and reduce the risk of electric shock.
- If operating a power tools in a damp location unavoidable use

a residual current device (RCD) protected supply. Use of an RCD reduces the risk of electric shock.

## **\_PERSONAL SAFETY**

- Stay alert watch what you are doing and use common sense when operating a power tool. Do not use tool while tired or under the influence of drugs alcohol or medication.

A moment of inattention while operating power tools may result in serious personal injury.

- Use personal equipment. Always wear eye protection. safety equipment such as duse mask non-skid safety shoes hard hat or hearing protection used for appropriate conditions will reduce personal injuries.
- Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source picking up or carrying the tool.carrying power tools with your finger on the swich or energizing power tools that have the switch on invites accidents.
- Remove any adjusting key or wrench before turning the power tool on. A wrench or a key left attached to a rotating part of the power tool may result in personal injury.
- Do not overreach. keep proper footing and balance at all times. Proper footing and balance enables better control of the tool in unexpected situations.
- Dress property. Do not wear loose clothing or jewellery. contain long hair. Keep your hair clothing and gloves away from moving parts. Loose clothes jewellery or long hair can be caught in moving parts.

- If devices are provided for the connection of dust extraction and collection facilities ensure these connected and properly used. Use of duse collection can reduce dust-related hazards.

## **■POWER TOOL USE AND CARE**

- Do not force the power tool. Use the correct power tool for your application. The correct power tool will do the job better and safer at the rate for which it is designed.
- Do not use the power tool if the switch does not turn it on and off. Any power tool that cannot be controlled with the switch is dangerous and must be repaired.
- Disconnect the plug from the power source before making any adjustments changing accessories or storing the tool. such preventive safety measures reduce the risk of starting the tool accidentally.
- Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool. power tools are dangerous in the hands of untrained users.
- Maintain power tools. check for misalignment or binding of moving parts breakage of parts and sny other condition that may affect the power tool repaired before use. Many accidents are caused by poorly maintained power tools.
- Keep cutting tools sharp and clean. properly maintained cutting tools will sharp cutting edges are less likely to bind and are easier to control.
- Use the power tools accessories and tool bits etc. in accordance with these instructions and in the manner intended for the particular type of power tools taking into account the working conditions and the work to be performed. use of the power tools

for operation different from intemded could result in a hazardous situation.

## **SERVICE**

- Have your power tool serviced by a qualitied repair person using only indentical replacement parts. this will ensure that safety of the power tools is maintained.

Special Safety Warnings for Impact Drill:

- 1) Wear ear protectors with impact drills. Exposure to noise can cause hearing Loss.
- 2) Use auxiliary handles supplied with the tools.loss of control can cause personal injury.
- 3) Hold power tool by insulated gripping surfaces wrien performing an operation where the cutting accessory may contact hidden wiring or its cord. Cutting accessory contacting a "live" wire may make exposed metal parts of the power tool "live" and could give the operator an electric shock.

# **ADDITIONAL SAFETY REGULATIONS**



## A WARNING!

Remove the plug from socket before carrying out any installationa adjustment servicing or maintenance.

The manual should indicate the content as follow.

- 1) stay alert and use common sense when operating the tool. o not use the tool when tired or under influence of drug alcohol or medicine.
- 2) Never put fingers on the switch button while moving the tools to avoid unintentional starting of the tool.
- 3) Ensure the mounting screws and other assemblies are fixed properly and securely before operate the tool. Turn on the

switch and let the tool work for 30 second in a safe position. Stop immediately if considerable vibraton or other defects are detectedhave it repaired.

Wear hearing protection while operating the power tools. The declared vibration total value has been measured in accordance with a standard test method and may be used for companing one tool with another.

The declared vibration total value may also be used in a preliminary assessment of exposure.



## A WARNING!

The vibration emission during actual use of the power tool can differ from the declared total value depending on the ways in which the tools is used.

There is the need to identify safety measures to protect the operator that are based on an estimation of exposure in the actual condition of use (taking account of all parts of the operating cycle such as the times when the tool is switched off and when it is running idle in addition to the trigger time).

# **ASSEMBLY**

## **CHANGING THE TOOL**

Before any work on the power tool(e.g.maintenancetool change etc.) as well as during transport and storageset the rotational direction switch to the center position.unintentional actuation of the on/off switch can lead to injuries.

The drill spindle is locked when the ON/OFF switch 5 is not pressed. This makes guick convenient and easy changing of the tool in the drill chuck possible.

Open the keyless chuk by turning in rotation direction until the tool can be inserted.insert the tool.

Firmly tighten the collar of the keylees chuck by hand in rotation direction.

## REPLACING THE DRILL CHUCK

Before any work on the power tool(e.g.maintenancetool change etc.) as well as during transport and storageset the rotational direction switch to the center position. unintentional of the on/off switch can lead to injuries.

## **REMOVING THE SECURING SCREW**

The keyless chuck is secured with a securing screw against unintentional loosening from the drill spindle. completely open the keylees chuck and unscrew the securing screw in rotation direction.

Please note that the securing screw has a left-hand thread.

## **REMOVING THE DRILL CHUCK**

Clamp the short end of a hex key into the keyless chuck. Place the machine on a stable surface(e.g.a workbench). Hold the machine firmly and loosen the keyless chuck by turning the hex key in rotation direction. Loosen a tight-seated keyless chuck by giving the long end of the hex key a light blow.Remove the hex key from the keyless chuck and completely unscrew the keyless chuck.

## **MOUNTING THE DRILL CHUCK**

The drill chuck must be tightened with a tightening torque of approx. 20Nm Screw the securing screw in counter lock-wisw direction into the opened keyless chuck; Tightening torque approx. 4-5Nm. Always use a new securing screw, as the threads are covered with a thread-locking compound that loses its effect after multiple usage.

#### **DUST/CHIP EXTRACTION**

Dusts from materials such as lead-containing coatings, some wood types, minerals and metal can be harmful to one's health. Touching or breathing-in the dusts can cause allergic reactions and/or lead to respiratory infections of the user or bystanders. Certain dusts, such as oak or beech dust, are considered as carcinogenic, especially in connection with wood-treatment additives (chromate, wood preservative). Materials containing asbestos may only be worked by specialist.

Provide for good ventilation of the working place.

It is recommended to wear a p2 filter-class respirator.

Observe the relevant regulations in your country for the materials to be worked.

## **OPERATING**

Never cover the air vents since they must always be open for proper motor cooling.

# **STARTING OPERATION**

## **SWITCH ON AND OFF**

This tool is started and stopped by pressing and releasing the trigger on/off switch.

The speed can be adjusted in the high gear or in the law gear, by controlling the trigger-pressing force.

For continuity operation, press the lock button while pressing the trigger.

Press again to release the lock.

## **REVERSING THE ROTATIONAL DIRECTION**

The F/R lever is used to reverse the rotational of the machine. However, this is not possible with the on/off switch.

Right rotation: for drilling and deriving in screws, push the F/R lever left stop.

Left rotation: for loosening and unscrewing screws and nuts, press the F/R lever through to the right stop.

# **SETTING THE TORQUE**

with the clutch cap the required torque setting can be preselected in (18+1) steps. It the correct setting, he insert tool is stopped as soon as the screws is screwed flush into the material or when the adjusted torque is reached.

The safety clutch is deactivated in the position, e.g. for drilling. Select a higher setting or switch to the symbol when unscrewing screws.

#### **ADJUSTING THE SPEED**

The speed of the switched on power tool can be variably adjusted on how far the on/off switch 5 is pressed.

Fully automatic spindle locking (auto-lock).

When the on/off switch 5 is not pressed, the drill spindle and thus the too holder are locked.

This enables screws to be screwed in, allows for the tool to be used as a screwdriver.

## **RUN-ON BRAKE**

when the on/off switch is released, the chuck brakes to a stop, thus preventing the run-on of the tool.

When the on/off switch is released, the chuck brake to a stop, thus preventing the run-on of the tool.

When driving in screws, wait until the screw is screwed in flush with the material and then release the on/off switch.

By doing so, the head of the screw does not penetrate into the material.

Working instructions

Apply the power tool to the screw only it is switched off.

Rotating tool inserts can slip off.

## **\_TIPS**

After longer period of wording art law speed. Allow the machine to down by running it for approx.

Minutes at maximum speed with no load.

For drilling in metal, use only perfectly sharpened hss drill bits

(hss=high speed steel). before screwing larger, longer screws into hard materials, it is advisable to predrill a pilot hole with the core diameter of the thread to approx.2/3 of the screw length. Light pressure on the on/off switch results in a low rotational speed. Further pressure on the switch results in an increase in speed. Even when the power tool is used as prescribed it is not possible to eliminate all residual risk factors.

The following hazards may arise in connection with the power tool's construction and design:

- 1) Damage to lungs if an effective dust mask is not worn.
- 2) Damage to health resulting from vibration emission if the power tool is being used over longer period of time or not adequately managed and properly maintained.

## WARNING!

This power tool produces an electromagnetic field during operation. This field may under some circumstances interfere with active or passive medical implants. To reduce the risk of serious or fatal injury, we recommend persons with medical implants to consult their physician and the medical implant manufacturer before operating this machine.

## WARNING!

To ensure safety and reliability, all repairs should be performed by an authorized servise center or other qualifiled service organization.

## **ENVIRONMENTAL PROTECTION AND GUARANTEE**

Waste electrical products should not be disposed of with household waste.

Pleas recycle where facilities exist. check with your with your local authority or reatailer for recycling advice.

Residual risk

Even when the power tool is as prescribed it is not possible to eliminate with the power tools construction and design:

- 1) dameage to lungs if an effective dust mask is not worn.
- 2) damega to hearing if effective hearing protection is not worn.
- 3) damages to health resulting from vibration emission if the power tool is being used over longer period of time or not adequately managed and properly maintained Waring this machine produces an electromagnetic filed during operation. this filed may under some circumstances interfere with active or passive medical implants.to reduce the risk of serious or fatal injury, we recommend persons with medical implants to consult their physician and the medical implant manufacturer before operating this machine.