


Peripheral Pump
0.5hp

RH-4020

- Peripheral pump with compact dimensions and capable of generating high heads
- Suitable for clean water and free of solids and abrasives, non- viscous, nonaggressive, non-crystallised and chemically neutral, clean liquids
- Properly in domestic, small industrial, irrigation of gardens and allotments usage
- Provides with Thermal protector and insulation Class B to ensure motor long life
- ability for suction up to 8m
- More efficiency by using Ceramic/Graphite mechanical seal, brass impeller cast iron pump housing
- The motor duty type S1 and Anti lock system for impeller that all together lead to increase durability

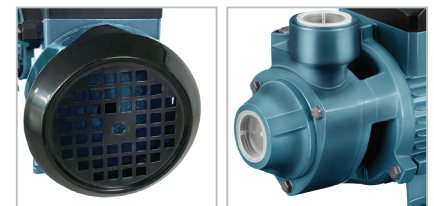

Model	RH-4020
Voltage	220-240V
Frequency	50Hz
Power	0.5hp
Min.Flow	0.3m ³ /h
Max. Flow	1.9m ³ /h
Min.Head	3m
Suction heigh	8m
Inlet/outlet port diameter	1In x 1In
Max. liquid temperature	60°C
Max. head	35m
Max. Ambient temperature	40°C
Speed	2850RPM
Working Pressure	3.5BAR
Protection level	IP44
Pump housing material	CAST IRON
Insulation Class	CLASS B
Mechanical seal material	C/G
Safety system	Anti lock system for impeller
Motor housing material	ALUMINUM
Motor protection	Thermal protection
Coil winding material	COPPER
Weight	5.6kg
shaft material	SS304+45
Supplied In	Ronix color box