


Self priming pump
1.0HP

RH-4023

- Peripheral pump with compact dimensions and capable of generating high heads
- Suitable for clean water and free of solids and abrasives, non-viscous, nonaggressive, non-crystallised and chemically neutral, clean liquids
- Properly in domestic, small industrial, irrigation of gardens and allotments usage
- Provides with Thermal protector and insulation Class B to ensure motor long life ability for suction up to 8 m
- More efficiency by using Ceramic/Graphite mechanical seal, brass impeller cast iron pump housing



Model	RH-4023
Power	1.0HP
Voltage	220V
Frequency	50Hz
Min.Flow	0.6m ³ /h
Max. Flow	2.88m ³ /h
Min.Head	3m
Max. head	65m
Inlet/outlet port diameter	1X1 In
Suction height	8m
Speed	2850RPM
Max. liquid temperature	60
Working Pressure	6.5Bar
Protection level	IP44
Max. Ambient temperature	40
Insulation Class	B
Pump housing material	CAST IRON
Motor housing material	ALUMINUM
Mechanical seal material	Ceramic/Graphite
Motor protection	WITH

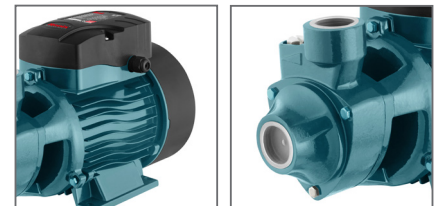

Coil winding material	COPPER
Impeller material	BRASS
shaft material	316+45
Weight	9.9Kg
Supplied In	color box