
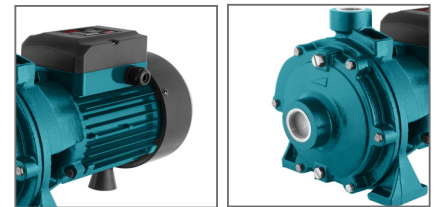


Self priming pump
1.5HP

RH-4024

- Pump with compact dimensions and capable of generating high heads
- Suitable for clean water and free of solids and abrasives, non-viscous, nonaggressive, non-crystallised and chemically neutral, clean liquids
- Properly in domestic, small industrial, irrigation of gardens and allotments usage
- Provides with Thermal protector and insulation Class B to sure motor long life ability for suction up to 8 m
- More efficiency by using Ceramic/Graphite mechanical seal, brass impeller cast iron pump housing

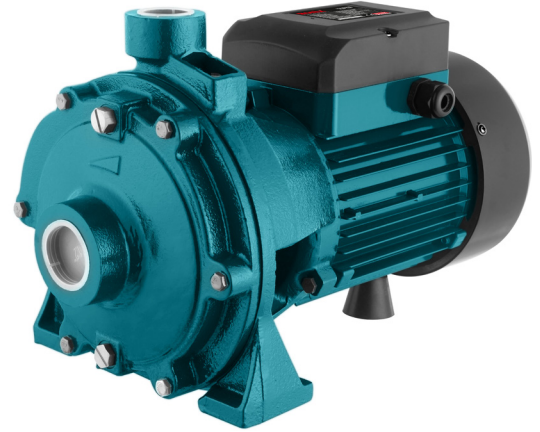

Model	RH-4024
Power	1.5HP
Voltage	220V
Frequency	50Hz
Min.Flow	2.4m ³ /h
Max. Flow	9.3m ³ /h
Min.Head	3m
Max. head	45m
Inlet/outlet port diameter	1 1/4X1 In
Suction heigh	8m
Speed	2850RPM
Max. liquid temperature	60
Max. Ambient temperature	40
Working Pressure	4.5BAR
Protection level	IP44
Insulation Class	B
Pump housing material	CAST IRON
Motor housing material	ALUMINUM
Mechanical seal material	Ceramic/Graphite
Motor protection	WITH
Coil winding material	COPPER
Shaft material	316+45
Impeller material	BRASS
Weight	22.7Kg
Supplied in	honeycomb carton