


**Laser Level**

**±2mm × 5m**

**RH-9501G**

- Both Indoor & Outdoor available(with detector)
- Vertical, Horizontal & Cross green Line Modes
- Able to set up quickly and effortlessly to project horizontal or vertical lines
- Self-leveling system compensate minor angular misalignments of ± 3 automatically
- Built-in locking system to lock the compensator when in transportation to avoid vibration
- Robust Over-Molded Housing
- Working with various related accessories to reach nearly all applications easily
- Pendulum lock for protecting laser system during movements
- Equipped with magnetic pivoting base which can be easily adsorbed onto metal parts

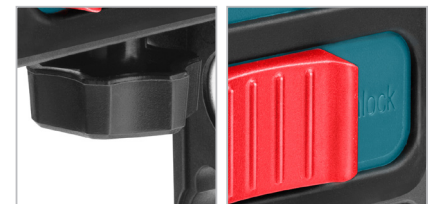

Model	RH-9501G
Accuracy	±2mm × 5m
Leveling Range	±3°
Working Range/With Detector	10/50 m (Working with laser receiver)
Tripod Thread	1/4"
Laser Color	Green
Laser Type	515nm, laser class II
Line Width	2mm × 10m
Operating Temperature	-10°C to 45°C
Storage Temperature	-20°C to 60°C
Dimension	65×65×65/mm <sup>3</sup>
Continuous Working Time (All Diodes)	≥ 5hour
Resistance	IP54
Power Supply	3×AAA Alkaline battery
Net Weight	0.23Kg
Total weight	0.64kg
Supplied in	Bag
Includes	FRJ300A Bracket, manual

