


Ronix[®]

Premium Quality


1/2 ELECTRIC STAPLER 7516

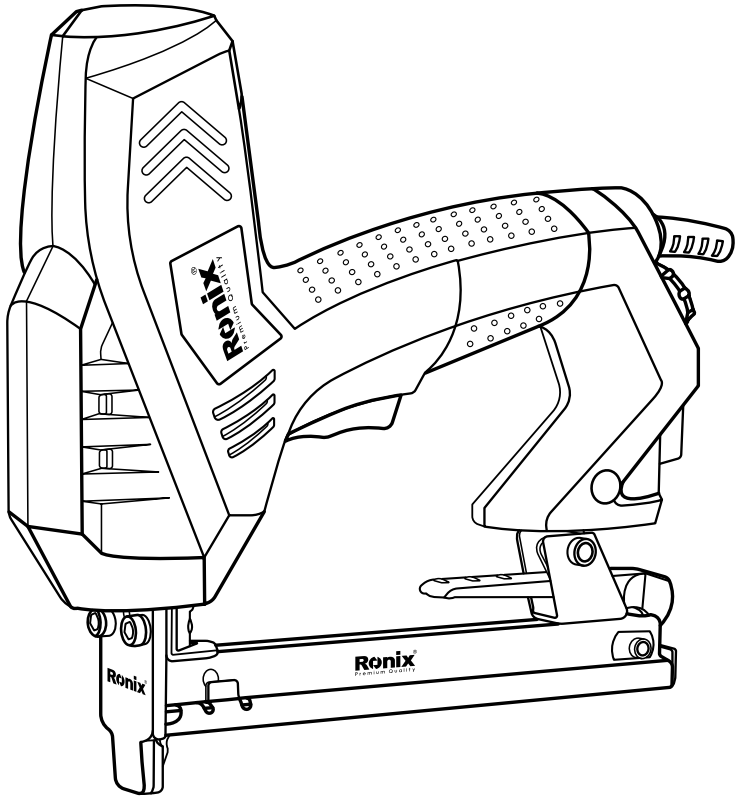

TECHNICAL SPECIFICATIONS

Model	7516
Power	2200W
Voltage	220-240V
Frequency	50-60Hz
Nb of Shots/Min	35 Shots/Min
Maximum Magazine Capacity	125
Max Nail Length	6-16mm
Staple Size	21Gauge, Crown Size:12.8MM, Lenght:6-16mm
Weight	1.4Kg
Includes	1pc hex. Wrench M3, 1pc Hex. Wrench M4

PART LIST

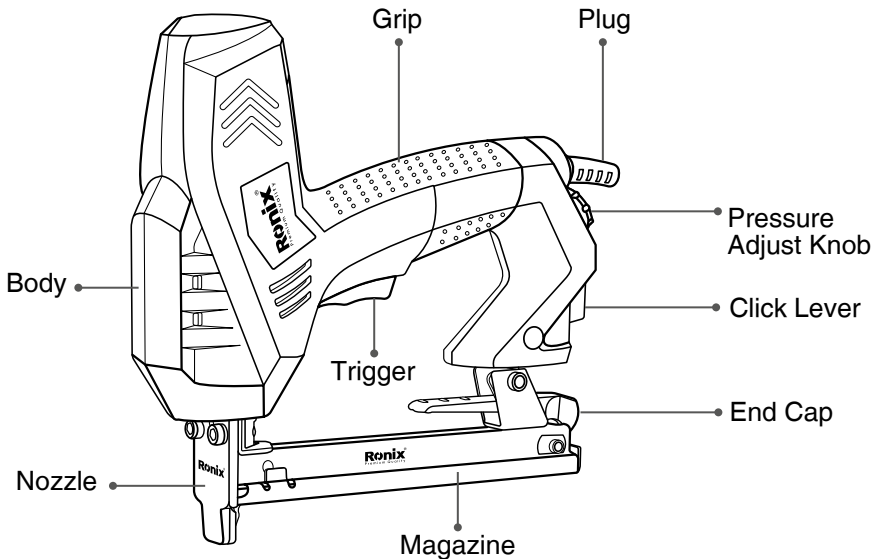


■ ELECTRIC STAPLER

Is a new kind convenient tool for room decorations, furniture and wooden box. It is convenient to carry and work more efficiently than pneumatic gun, also with low noise.


■ INSTALL STAPLES

Make sure the stapler power off before installing.


1- Press down the magazine latch and make it move back.

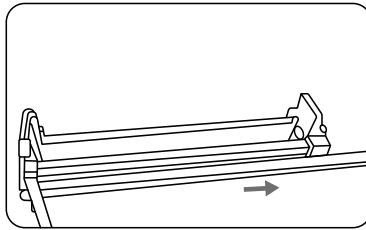

2- Put down the nail and staples in the magazine.

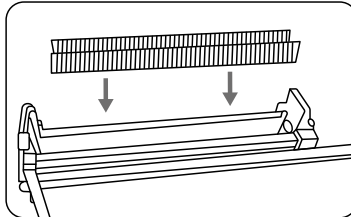


3- Closed the magazine, make sure it in the right position.



⚠ WARNING!


The magazine may be overload if the lid can not close, please try again after remove some nails or staples.

1- Check the power switch, let the power switch to "0" position. (used before)




2- Connect the power with wall switch or power socket.


3- Please move power switch to "I" position. The indicator light will light up.




4- Put the nails/staples in the magazine. And close the magazine.




5- Point the nail gun at wooden surface.



6- Press the switch and shot the nails or staples at right position.



7- If you work finish, please move the power switch to "o" position, the indicator light will turn off.




8- Disconnect the power, and open the magazine to take out the staples or nails.


■ FAILURE RECOVERY

Clear the be jam nails or staples, make sure the machine must be turn off before the following works,

1- Remove 3pcs screw at head



2- Remove the nails or staples which may cause a jam.



3- Electric stapler safety warning:

- Electric stapler is not a toy, so put it out of children reach.
- Electric stapler mis operation may cause unexpected personal injury
- Don not point the electric stapler an yourself our other people.
- Don not turn on the electric stapler, unless you are and safety environment.
- Please turn off the power when your clean the electric stapler.
- Don not use electric stapler wire for other machine ,may cause electric shock of fire.



www.ronixtools.com